

Harvest the Sunshine

JA SOLAR

460W



JAM54D40 LB n-type Double Glass Bifacial Modules

Premium Cells

n-
Bycium+
16BB

MBB Half-Cell
Technology

26%



Cell Conversion
Efficiency


Premium Modules

Higher power
generation better LCOE

n-type with very
Lower LID

Better Temperature
Coefficient

Better low irradiance
response

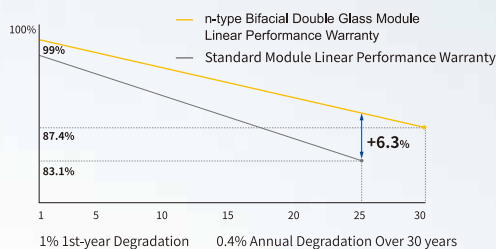

12-year product
warranty


30-year linear power
output warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



DEEP BLUE 4.0 Pro

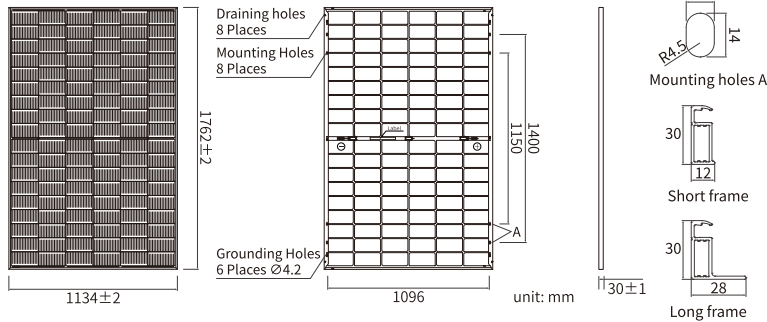

MECHANICAL PARAMETERS

| | |
|------------------------------------|---|
| Cell | Mono |
| Weight | 22kg |
| Dimensions | 1762±2mm × 1134±2mm × 30±1mm |
| Cable Cross Section Size | 4mm ² (IEC), 12 AWG(UL) |
| No. of cells | 108(6×18) |
| Junction Box | IP68, 3diodes |
| Connector | QC 4.10-351/ MC4-EVO2A |
| Cable Length (Including Connector) | Portrait: 300mm(+)/400mm(-) Landscape: 1200mm(+)/1200mm(-) |
| Front Glass/Back Glass | 1.6mm/1.6mm |
| Packaging Configuration | 36pcs/Pallet, 936pcs/40HQ Container |

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC


| TYPE | JAM54D40 -435/LB | JAM54D40 -440/LB | JAM54D40 -445/LB | JAM54D40 -450/LB | JAM54D40 -455/LB | JAM54D40 -460/LB |
|--|---|---------------------|---------------------|---------------------|---------------------|---------------------|
| Rated Maximum Power(Pmax) [W] | 435 | 440 | 445 | 450 | 455 | 460 |
| Open Circuit Voltage (Voc) [V] | 38.70 | 38.90 | 39.10 | 39.30 | 39.50 | 39.70 |
| Maximum Power Voltage(Vmp) [V] | 32.29 | 32.47 | 32.65 | 32.82 | 33.00 | 33.17 |
| Short Circuit Current(Isc) [A] | 14.23 | 14.31 | 14.40 | 14.48 | 14.56 | 14.64 |
| Maximum Power Current(Imp) [A] | 13.47 | 13.55 | 13.63 | 13.71 | 13.79 | 13.87 |
| Module Efficiency [%] | 21.8 | 22.0 | 22.3 | 22.5 | 22.8 | 23.0 |
| Power Tolerance | 0~+3% | | | | | |
| Temperature Coefficient of Isc(α _{Isc}) | +0.045%/°C | | | | | |
| Temperature Coefficient of Voc (β _{Voc}) | -0.250%/°C | | | | | |
| Temperature Coefficient of Pmax(γ _{Pmp}) | -0.290%/°C | | | | | |
| STC | Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G | | | | | |

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

| TYPE | JAM54D40 -435/LB | JAM54D40 -440/LB | JAM54D40 -445/LB | JAM54D40 -450/LB | JAM54D40 -455/LB | JAM54D40 -460/LB |
|--------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Rated Max Power(Pmax) [W] | 470 | 475 | 481 | 486 | 491 | 497 |
| Open Circuit Voltage(Voc) [V] | 38.70 | 38.90 | 39.10 | 39.30 | 39.50 | 39.70 |
| Max Power Voltage(Vmp) [V] | 32.29 | 32.47 | 32.65 | 32.82 | 32.99 | 33.17 |
| Short Circuit Current(Isc) [A] | 15.36 | 15.46 | 15.55 | 15.64 | 15.73 | 15.81 |
| Max Power Current(Imp) [A] | 14.55 | 14.63 | 14.72 | 14.81 | 14.89 | 14.98 |
| Irradiation Ratio (rear/front) | 10% | | | | | |

CHARACTERISTICS

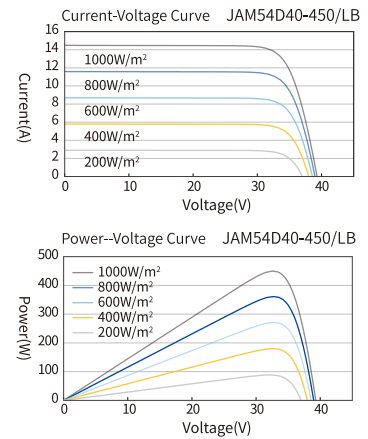

OPERATING CONDITIONS

| | |
|----------------------------|---------------------------------|
| Maximum System Voltage | 1500V DC |
| Operating Temperature | -40°C~+85°C |
| Maximum Series Fuse Rating | 30A |
| Maximum Static Load, Front | 5400Pa(112 lb/ft ²) |
| Maximum Static Load, Back | 2400Pa(50 lb/ft ²) |
| NOCT | 45±2°C |
| Bifaciality | 80%±5% |
| Safety Class | Class II |
| Fire Performance | UL Type 38/Class C |